



- NOTE:
- 6mm WIDE SEALANT RESERVOIR IS DESIGNED TO SUIT A PERFORMED NEOPRENE COMPRESSION SEAL AS FOLLOWS:
 - 11mm UNCOMPRESSED WIDTH
 - SET 3-6mm BELOW SURFACE
 - CHECK MANUFACTURERS SPECIFICATION
 - SURFACE TEXTURE BY TRANSVERSE BROOMING
 - CURING IMMEDIATELY AFTER FINISHING OPERATIONS ARE COMPLETE - REFER TO SECTION 9 OF C&CA TECHNICAL NOTES SEPT. 1982 (OUTLINE GUIDE FOR CONSTRUCTION OF CONCRETE ROAD PAVEMENTS).
 - LONGITUDINAL EDGE TO BE ROUNDED TO 6mm ϕ .

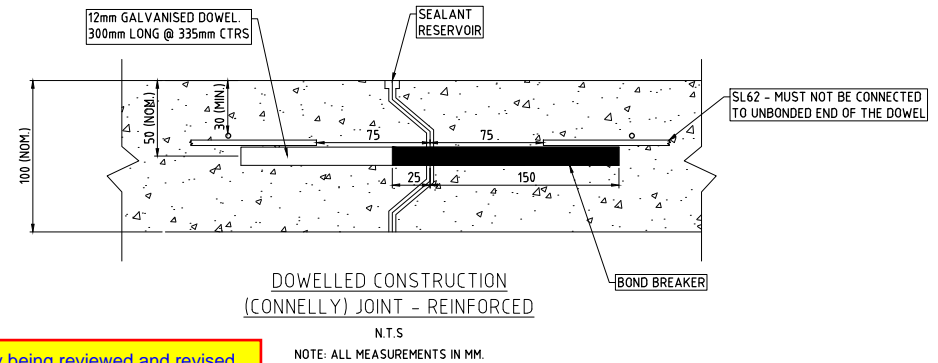

Council's Standard Drawings are currently being reviewed and revised and are provided as a guide only. The Standard Drawings are to be read in conjunction with Council's Infrastructure Specifications and if there is potential conflict between Drawings and Specifications, the requirements in the Specifications take precedence.

DATE	DESCRIPTION	REV	OFFICER
10.05.2017	UPDATED DRAFTING STANDARDS	B	A. SALAMON
05.03.2013	STANDARD CYCLEWAY	A	-

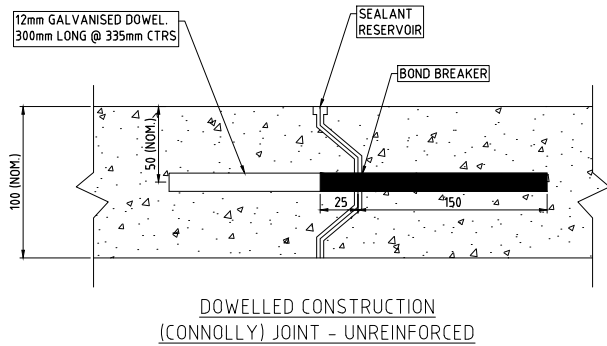

DRAWING TITLE:	Revision: B
STANDARD CYCLEWAY	Plan No. S152
	Date: 10.05.2017
	Sheet Size A4